


Data Sheet

Protan PROGRIP R Walkway is for use on all Protan exposed roofs to provide safe access for maintenance of roof top services and frequently accessed areas.

Protan PROGRIP R Walkway

The walkway is designed to be completely impervious to all weathers and its 14mm height provides permanent slip resistance.

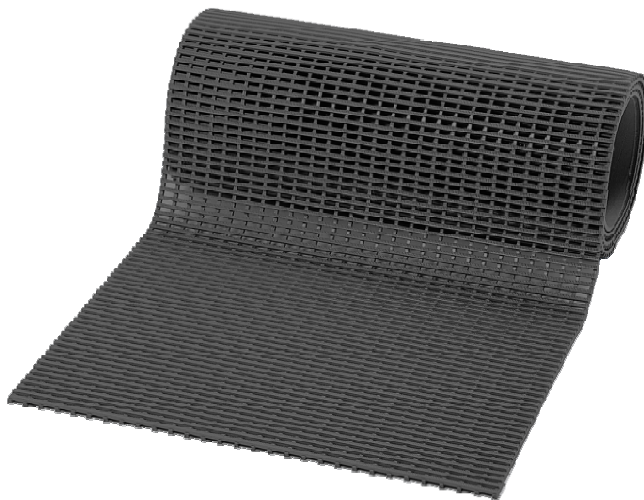

Protan PROGRIP R Walkway	
Dimensions	600mm x 14mm x 10m
Colour	Black
Composition	Flexible PVC
Construction	Open grid
Flammability	Classified as resistant to flame to DIN 4102 Part 1 - Classification B2
Chemical	Resistant to most acids, alkalines and oils.
Thermal	Functional from - 23°C to +60°C
Ultra Violet Light (UV)	Resistant to PVC degradation.
Slip Resistance	ASTM F 1677 (Dry/Wet): Crossgrip - (0.6/0.5)
Wind Performance	Stable in winds up to 94mph / 150km/h / 40m/s
Impact Resistance	PROGRIP R can generally withstand an impact weight of up to 1.5kg from a 300mm drop at temperatures to -40°C

Environment


The walkway is manufactured from flexible PVC and at the end of its working life it can be 100% recycled.

Installation

The walkway is quick and easy to install as it comes in roll of 10m. Membrane loops are fixed at either end of the roll with loops installed every 2m on alternate sides of the walkway. The loops are hot air welded to the underlying Protan membrane.


Slip resistance

The cross directional top ribs combined with the "diamond cut" top surface, gives excellent slip resistance, particularly when walking along the length of the walkway. The walkway has been tested according to DIN 51130.

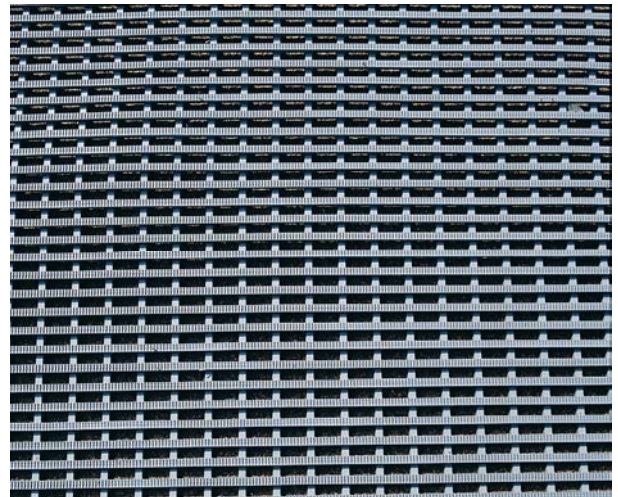

Drainage

The walkway has a 14mm height and open grid format which allows for excellent drainage.

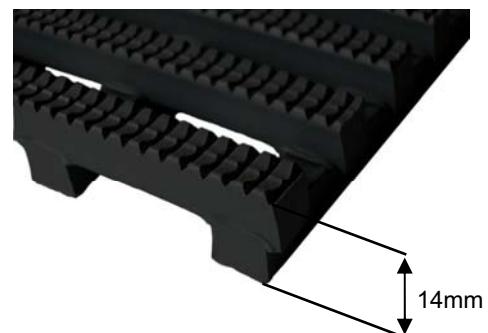

Maintenance

PROGRIP walkway requires only minimal maintenance. Any debris should be cleared out from underneath the walkway annually.